

1" Mini-Receptacle Connectors, Front Mount, US Color Code

RSF 60B...80M | RKF 601B...801M





Male, 6-, 7-, and 8-Pole

Receptacle connector, 1"-B body, male
 6-, 7-, and 8-pole for front mounting,
 assembled stranded wire, potted with epoxy,
 chassis side thread 1/2" NPT, screw connection.

- US Color Code -

RSF 60B...80M

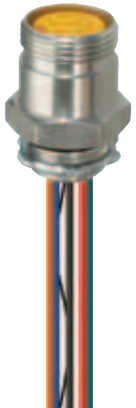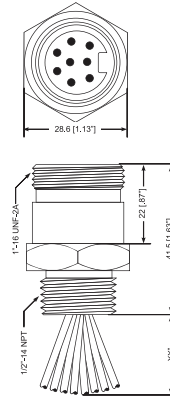


Female, 6-, 7-, and 8-Pole

Receptacle connector, 1"-B body, female
 6-, 7-, and 8-pole for front mounting,
 assembled stranded wire, potted with epoxy,
 chassis side thread 1/2" NPT, screw connection.

- US Color Code -


RKF 601B...801M

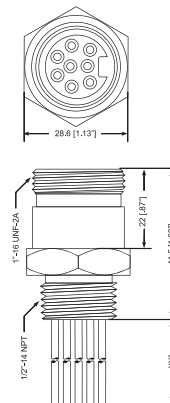

Pin Assignments


Face Views, 1"-Male / Female

6 pole




1 = orange
 2 = blue
 3 = black
 4 = white
 5 = red
 6 = green

7 pole



1 = white/black
 2 = black
 3 = white
 4 = red
 5 = orange
 6 = blue
 7 = green

8 pole



1 = orange
 2 = blue
 3 = white/black
 4 = black
 5 = white
 6 = red
 7 = green
 8 = red/black



Be Certain with Belden

1" Mini-Receptacle Connectors, Front Mount, US Color Code

RSF 60B...80M | RKF 601B...801M

Technical Data

Environmental

Degree of protection IP 68 / NEMA 6P
 Operating temperature range -40°C (-40°F) / +90°C (+194°F)





Mechanical

Insert TPU, yellow
 Contacts CuZn, gold plated
 Receptacle shell Aluminum (anodized, clear)
 Locknut Steel, zinc plated
 O-ring Viton

Electrical

Current rating 6 and 7 pole: 8 A
 8 pole: 7 A
 Voltage rating 600 V

Receptacles

Part Number	Pins	Gauge	Characteristics
RSF 60B-696/1F RKF 601B-696/1F	6	16	 
RSF 70M-622/1F RKF 701M-622/1F	7	16	 
RSF 80M-698/1F RKF 801M-698/1F	8	16	