

M8-Double-Ended Cordsets for Actuators, Sensors and Distribution Boxes


RSMV-RKMVV | RSMV-RKMVV/LED



3-Poles


Actuator/sensor cordset, double-ended, M8, 3-pole male straight with threaded joint to female 90° connector and molded cable.

RSMV-RKMVV

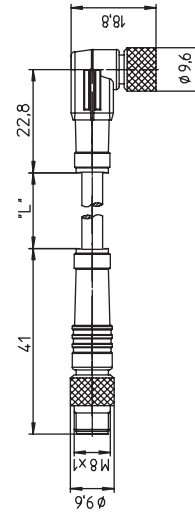

Actuator/sensor cordset, double-ended, M8, 3-pole, male straight with threaded joint to female 90° connector with LED operation and function indicator and molded cable.


RSMV-RKMVV/LED

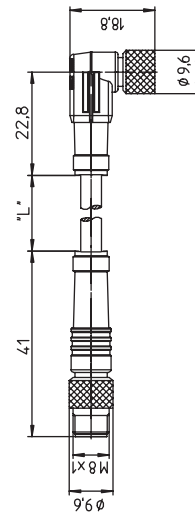

Pin Assignments

M8 - Male / Female


3 poles



1 = brown
3 = blue
4 = black

Wiring Diagram / LED

pnp Normally open = yellow-green





Be Certain with Belden

M8-Double-Ended Cordsets for Actuators, Sensors and Distribution Boxes
RSMV-RKMWW | RSMV-RKMWW/LED

Technical Data

Environmental

Degree of protection IP 65 / IP 67 / NEMA 6P
Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU, self-extinguishing
Insert PA / TPU
Contact CuZn, pre-nickel and 0.8 microns gold-plated
Coupling nut CuZn, nickel-plated (only RSMV / RKMV)

Electrical

Nominal current at 40°C 4 A
Nominal voltage RSMV / RKMWW: 60 V
RKMWW/LED: 10-30 V DC
Rated voltage RSMV / RKMWW: 63 V
RKMWW/LED: 32 V
Test voltage 1.5 kV eff. / 60 s
Insulation resistance > 10⁹ Ω
Pollution degree 3

Cable Specifications

Cable No.	Outer Jacket	Gauge	Jacket Color	OD	Agency Approvals
224	PUR, halogen-free	3 x 0.34 mm ²	Black	.169" (4.3 mm)	UL: AWM 21198 / CSA: AWM I/II A/B

Cordsets
Double-Ended

Part Number	Pins	Standard Cable Lengths	Characteristics
RSMV 3-RKMWW 3-224/...M	3	0.6 M / 1 M / 2 M	

