

## A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male-Female, Double-ended Cordset

RSPA-RKPA | RSPA-RKWPA


### RSPA-RKPA | RSPA-RKWPA



### 3- and 4-Pole


7/8" Mini, 3- and 4-Pole, 14AWG TC-ER Rated Cable, Male-Female, Double-ended Cordset

### RSPA-RKPA

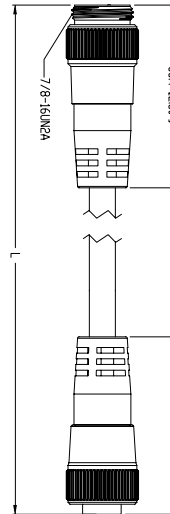

7/8" Mini, 3- and 4-Pole, 14AWG TC-ER Rated Cable, Male-Female 90°, Double-ended Cordset

### RSPA-RKWPA

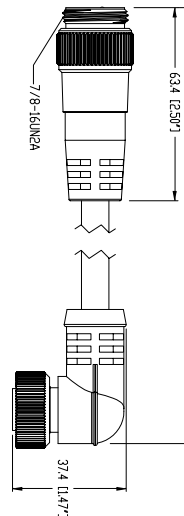


## Pin Assignments

### Face Views

#### 3 pole


#### Male / Female



- 1 = black
- 2 = green/yellow
- 3 = white

#### 4 pole

#### Male / Female



- 1 = black
- 2 = white
- 3 = red
- 4 = green/yellow

# Be Certain with Belden

## A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male-Female, Double-ended Cordset RSPA-RKPA | RSPA-RKWPA

### Technical Data

#### Environmental

Degree of protection NEMA 6P-IP68, IP67  
Operating temperature range -30°C (-86°F) / +90°C (194°F)

#### Mechanical










Housing / Molded body PVC / Black  
Contact carrier PVC / Black  
Contacts CuSn alloy / gold over Ni plated  
Coupling nut CuZn / Ni  
Conductor insulation: PVC / nylon

#### Electrical

Voltage rating 600 V

### Cable Specifications

Cable No.	Conductors	Outer Jacket	Gauge	Jacket Color	OD
802	3	TPE	14AWG	Black	.359" (9.1 mm)
805	4	TPE	14AWG	Black	.390" (9.9 mm)

Part Number	Pins	Gauge	Current Rating	Standard Cable Lengths	Characteristics
RSPA 3-RKPA 3-802/...M	3	14	18A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	  
RSPA 4-RKPA 4-805/...M	4	14	15A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	  
RSPA 3-RKWPA 3-802/...M	3	14	18A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	  
RSPA 4-RKWPA 4-805/...M	4	14	15A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	