

A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male/Female, Single-ended Cordset
RSPA | RKPA


RSPA | RKPA



3- and 4-Pole


7/8" Mini, 3- and 4-Pole, 14AWG TC-ER Rated Cable, Male, Single-ended Cordset

RSPA

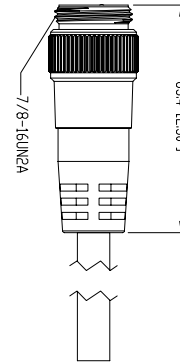

7/8" Mini, 3- and 4-Pole, 14AWG TC-ER Rated Cable, Female, Single-ended Cordset

RKPA

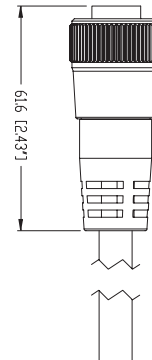

Pin Assignments

Face Views

3 pole
Male / Female



- 1 = black
- 2 = green/yellow
- 3 = white

4 pole
Male / Female



- 1 = black
- 2 = white
- 3 = red
- 4 = green/yellow

Be Certain with Belden

A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male/Female, Single-ended Cordset RSPA | RKPA

Technical Data

Environmental

Degree of protection NEMA 6P-IP68, IP67
 Operating temperature range -30°C (-86°F) / +90°C (194°F)

Mechanical













Housing / Molded body PVC / Black
 Contact carrier PVC / Black
 Contacts CuSn alloy / gold over Ni plated
 Coupling nut CuZn / Ni
 Conductor insulation: PVC / nylon

Electrical

Voltage rating 600 V

Cable Specifications

| Cable No. | Conductors | Outer Jacket | Gauge | Jacket Color | OD |
|-----------|------------|--------------|-------|--------------|----------------|
| 802 | 3 | TPE | 14AWG | Black | .359" (9.1 mm) |
| 805 | 4 | TPE | 14AWG | Black | .390" (9.9 mm) |

| Part Number | Pins | Gauge | Current Rating | Standard Cable Lengths | Characteristics |
|-----------------|------|-------|----------------|---|---|
| RSPA 3-802/...M | 3 | 14 | 18A | 0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M |    |
| RSPA 4-805/...M | 4 | 14 | 15A | 0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M |    |
| RKPA 3-802/...M | 3 | 14 | 18A | 0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M |    |
| RKPA 4-805/...M | 4 | 14 | 15A | 0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M |    |