




LioN-Power Active I/O M12, M12 Power (L-coded), PROFINET, 8DI/8DO

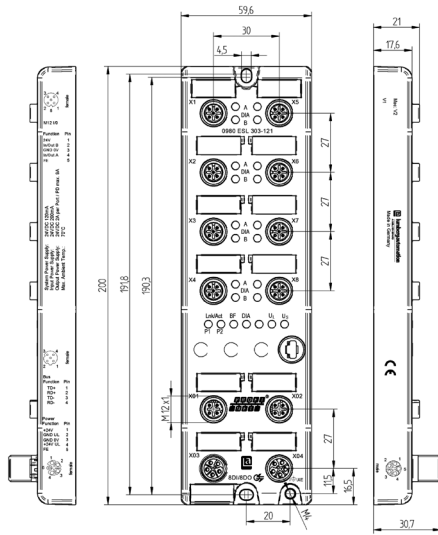

Type	0980 ESL 303-121	
Product Description	LioN-P PROFINET device, 8 digital input channels and 8 digital output channels with galvanic isolation, M12 LAN connection, 4-poles, D-coded, M12 L-coded power supply, 5-poles	
Diagnostic indication		
LED	Indication	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Peripheral fault
1...8 B	White	Channel status
1...8 DIA B	Red	Peripheral fault
P1 Lnk/Act	Green Green blinking Off	Connection to an Ethernet subscriber IO device is in data exchange No connection to another subscriber
P2 Lnk/Act	Green Yellow blinking Off	Connection to an Ethernet subscriber IO device is in data exchange No connection to another subscriber
BF	Red Off	Bus fault, no communication No fault present
DIA	Red Red blinking Off	Collective display peripheral fault Firmware update No fault present
U _s	Green Red	Voltage 19V ≤ U _s ≤ 30V U _s Voltage < 19V or U _s > 30V
U _L	Green Red	Voltage 19V ≤ U _L ≤ 30V U _L Voltage < 19V or U _L > 30V

Bit assignment								
Bit	7	6	5	4	3	2	1	0
Input Data: 8DI								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Output Data: 8DO								
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

Pin assignment		
M12 I/O port, A-coded	M12 Power connector, L-coded	M12 PROFINET, D-coded
<ul style="list-style-type: none"> 1 = +24V 2 = In/Out B 3 = GND 0V 4 = In/Out A 5 = FE 	<ul style="list-style-type: none"> 1 = +24V 2 = GND UL 3 = GND 0V 4 = +24V UL 5 = FE 	<ul style="list-style-type: none"> 1 = TD+ 2 = RD+ 3 = TD- 4 = RD-

Part number	Order number
0980 ESL 303-121	934878003

LioN-Power Active I/O M12, M12 Power (L-coded), PROFINET, 8DI/8DO

Technical Data	
Environmental Temperature	-20 °C to +70 °C (Operation)
Housing Material	Metal Zinc Die-cast
Contact Bearer	PA
Contact	M12 A, D-coded CuSn, Gold-plated M12 L-coded CuNi, Gold-plated
O-ring	FKM
Mechanical Data	
Weight	500 g
Protection Class (IEC 60529)	IP65, IP67 (only if mounted and locked in combination with Hirschmann/Lumberg connector)
Module Supply	
Rated Voltage	24V DC
Voltage Range	19 to 30V DC
Nominal Current	16 A
Connection Type	M12 Power, 5-poles, L-coded
Number	2
Bus-System	
Network	PROFINET
Transmission Rate	10/100 Mbit/s
Connection Type	M12 LAN connection, 4 poles, D-coded
Number	2
Outputs	
Number of Digital Channels	8
Actoric Current	2 A per channel
Actoric Current (max.)	9 A
Short-circuit Proof	yes
Channel Type N.O.	p-switching
Status Indicator	LED white or yellow per channel
Diagnostic Indicator	LED red per port
Inputs	
Number of Digital Channels	8
Type	Type 3 acc. IEC 61131-2
Sensor Type	PNP
Status Indicator	LED white or yellow per channel
Diagnostic Indicator	LED red per port
Sensor Current Supply	200 mA per port

The application of these products in harsh environments should always be checked before use.
 Specifications subject to alteration.