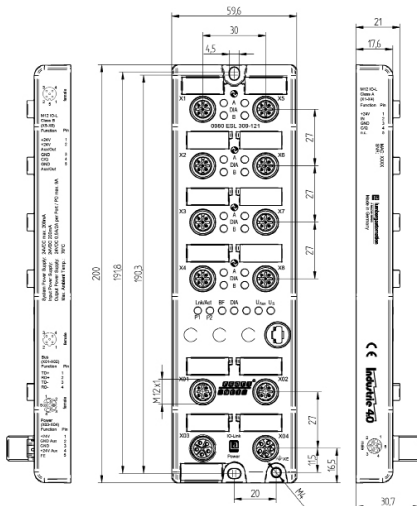







LioN-Power Active I/O M12, M12 Power (L-coded), PROFINET, IO-Link Master



Type	0980 ESL 309-121	
Product Description	LioN-P PROFINET device, 4 digital input channels, 8 IO-Link channels, M12 LAN connection, 4-poles, D-coded, M12 L-coded power supply, 5-poles	
Diagnostic indication		
LED	Indication	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Peripheral fault
1...8 B	White	Channel status
1...8 DIA B	Red	Peripheral fault
1...8 IO-Link	Green blinking	No IO-Link Device Connected
	Green	IO-Link communication available
	Off	Port is not configured as IO-Link
P1 Lnk/Act	Green	Connection to an Ethernet subscriber
	Green blinking	IO device is in data exchange
	Off	No connection to another subscriber
P2 Lnk/Act	Green	Connection to an Ethernet subscriber
	Yellow blinking	IO device is in data exchange
	Off	No connection to another subscriber
BF	Red	Bus fault, no communication
	Off	No fault present
DIA	Red	Collective display peripheral fault
	Red blinking	Firmware update
	Off	No fault present
U_s	Green	Voltage 19V ≤ U _s ≤ 30V
U_{Aux}	Green	Voltage 19V ≤ U _L ≤ 30V
	Red	U _L Voltage < 19V or U _L > 30V

Please refer to the manual regarding the Bit assignment of the Ports.

Pin assignment				
M12 IO-Link Port Type A (X01...X04), A-coded	M12 IO-Link Port Type B (X05...X08), A-coded	M12 PROFINET I/O-L Class B (X5-X8), D-Coded	M12 Power (X03-X04) connector, L-coded	M12 PROFINET, D-coded
 <ul style="list-style-type: none"> 1 = +24V 2 = IN 3 = GND 4 = C/Q 5 = n.c. 	 <ul style="list-style-type: none"> 1 = +24V 2 = +24V Aux/Out 3 = GND 4 = C/Q 5 = GND Aux 	 <ul style="list-style-type: none"> 1 = +24V 2 = +24V Aux/Out 3 = GND 4 = C/Q 5 = GND Aux/Out 	 <ul style="list-style-type: none"> 1 = +24V 2 = GND Aux 3 = GND 4 = +24V Aux 5 = FE 	 <ul style="list-style-type: none"> 1 = TD+ 2 = RD+ 3 = TD- 4 = RD-

Part number	Order number
0980 ESL 309-121	934878004

Be Certain with Belden

LioN-Power Active I/O M12, M12 Power (L-coded), PROFINET, IO-Link Master

Technical Data	
Environmental Temperature	-20° C to +70° C (Operation)
Housing Material	Metal Zinc Die-cast
Contact Bearer	M12 A, D-coded CuSn, Gold-plated M12 L-coded CuNi, Gold-plated
O-ring	FKM
Mechanical Data	
Weight	500 g
Protection Class (IEC 60529)	IP65, IP67, IP69K (only if mounted and locked in combination with Hirschmann/Lumberg connector.)
Module Supply	
Rated Voltage	24V DC
Voltage Range	19 to 30V DC
Nominal Current	16 A
Connection Type	M12 Power, 5-poles, L-coded
Number	2
Bus-System	
Network	PROFINET
Transmission Rate	10/100 Mbit/s
Connection Type	M12 LAN connection, 4 poles, D-coded
Number	2
Outputs (8IOL)	
Number of Digital Channels	max. 8 via C/Q
Actoric Current	2A
Actoric Current (max.)	9 A
Short-circuit Proof	yes
Channel Type N.O.	p-switching
Status Indicator	LED white or yellow per channel
Diagnostic Indicator	LED red per port
Inputs (8IOL + 4 DI)	
Number of Digital Channels	4 + max. 8 via C/Q
Type	Type 1 acc. IEC 61131-2 (Dig. Input)
Sensor Type	PNP
Status Indicator	LED white or yellow per channel
Diagnostic Indicator	LED red per port
Sensor Current Supply	200 mA per port
IO-Link (8IOL)	
Number of IO-Link Channels	8
Number of A Ports	4
Number of B Ports	4
Nominal Current C/Q (Pin 4)	500 mA
Nominal Current L+/L- (Pin 1 and 3)	200 mA
Nominal Current Ua (Type B Ports, Pin 2 and 5)	2 A
Short-circuit Proof	yes
Cable Length to Sensor	< 20m

The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.